


# Oil / Coalescing/Skimming Systems For Use in Hand Held Carwashes



**OCS110**

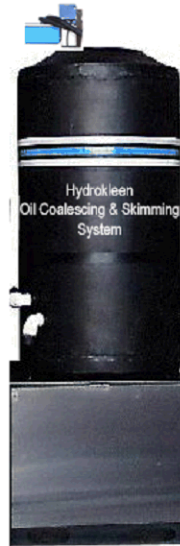

**OCS250**



**OCS500**

## Specifications:

- Dimension: 34 x 34" x 40"
- Electrical: 115 Volt 9 Amp
- Flow rate: 10 GPM
- d72,022 sq. in. coalescing plates

## Specifications:

- Dimension: 34 x 34" x 96"
- Electrical: 115 Volt 9 Amp
- Flow rate: 50 GPM
- 150,782 sq. in. coalescing plates

## Specifications:

- Dimension: 48 x 48" x 76"
- Electrical : 115 Volt 9 Amp
- Flow rate: 50-70 GPM
- 225,043 sq. in. coalescing plates

## Standard Features:

- Removes oils and grease from engine cleaning and unauthorized dumping
- Self-cleaning tank makes sludge removal easy
- Factory assembled and tested
- Gravity flow through design
- Automatic belt skimmer
- Hundreds are in successful daily use
- Overflow protection device

## How it Works:

Our state of the art oil coalescing and skimming systems can be fed by pump or gravity. Emulsified oil and grease are directed through the coalescing media where they accumulate on the surface of the oil attractant material of the plates. Once large enough to float free to the surface the oils are permanently removed from the system by an electric belt skimmer. The automatic skimmer deposits the oils into a decanter where trace amounts of water are directed back into the coalescing tank and oils are dispensed into an oil drum or bucket supplied by the customer.

1. Specifications are effective April, 2003

2. Specifications are subject to change without notice.



865 West 2600 South, Salt Lake City, UT 84119  
Phone 800-247-8424 or 801-972-1181 Fax 801-972-3265

HYDROBLASTERS - HYDROKLEEN - HYDROPAD

[www.hydroblaster.com](http://www.hydroblaster.com)